

CAVAL

ISLAND BATH/SPA BATH - Premium Sanitary Grade Acrylic, High Gloss White

Made in Australia

The Caval's oval design takes it to the new level. Its extended length & width provide that extra space that makes it a perfect bath for two. Centre waste position.

☒ Molded arm rests

☒ Lumbar support

☑ Suitable for dual bathing

☒ Slip resistant pattern



CAVAL BATH

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1790 x 900 x 496	188L	28.5kg	CA1800W



- 15 YR WARRANTY*
- AS/NZ Standard 2013/1995
- Steel rod reinforced rim
- Double reinforced bath base

CAVAL SANTAI SPA BATH ● 12 JETS

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1790 x 900 x 496	188L	50kg	CA1800SAN12JW

- 10 YR WARRANTY* - SPA SHELL
- 5 YR WARRANTY* - PUMP, JETS & FITTINGS
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x low profile Mod centro jets
- 6 x low profile Mod mini jets
- 1 x low profile Mod suction
- 1 x Mod power button (rim mounted)
- 2 x Mod air controls (rim mounted)
- 750 watt auto heat boost pump

CAVAL CONTOUR SPA BATH ●● 14 JETS

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1790 x 900 x 496	188L	50kg	CA1800CNPAWC

- 10 YR WARRANTY* - SPA SHELL
- 5 YR WARRANTY* - PUMP, JETS & FITTINGS
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x flush C-Lenda™ centro jets
- 8 x flush C-Lenda™ mini jets
- 2 x flush C-Lenda™ air controls
- 1 x flush C-Lenda™ suction
- 1 x Sensa-Touch pad control (rim mounted)
- 750 watt 3-stage heat boost pump

CAVAL DOLCE VITA SPA BATH ●●● 18 JETS

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1790 x 900 x 496	188L	70kg	CA1800DVPAWC

- 10 YR WARRANTY* - SPA SHELL
- 5 YR WARRANTY* - PUMP, JETS & FITTINGS
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x adjustable flush C-Lenda™ centro jets
- 12 x adjustable flush C-Lenda™ mini jets
- 2 x flush C-Lenda™ air controls
- 1 x flush C-Lenda™ suction
- Spa Key remote control
- 1100 watt spa key heat boost pump



Available with chrome, white or black jets with stainless steel trim




CAVAL ACCESSORIES	BATH	SANTAI SPA BATH	CONTOUR SPA BATH	DOLCE VITA SPA BATH
Ezi Frame/Base Support Frame	Optional	Optional	Optional	✓
SIA Headrests (Black/White)	Optional	Optional	✓ x 2	✓ x 2
Overflow	Optional	Optional	Optional	Optional
Plug & Waste	Optional	Optional	Optional	Optional

*Capacity 200mm below the bath rim

CAVAL

ISLAND BATH/SPA BATH - Premium Sanitary Grade Acrylic, High Gloss White

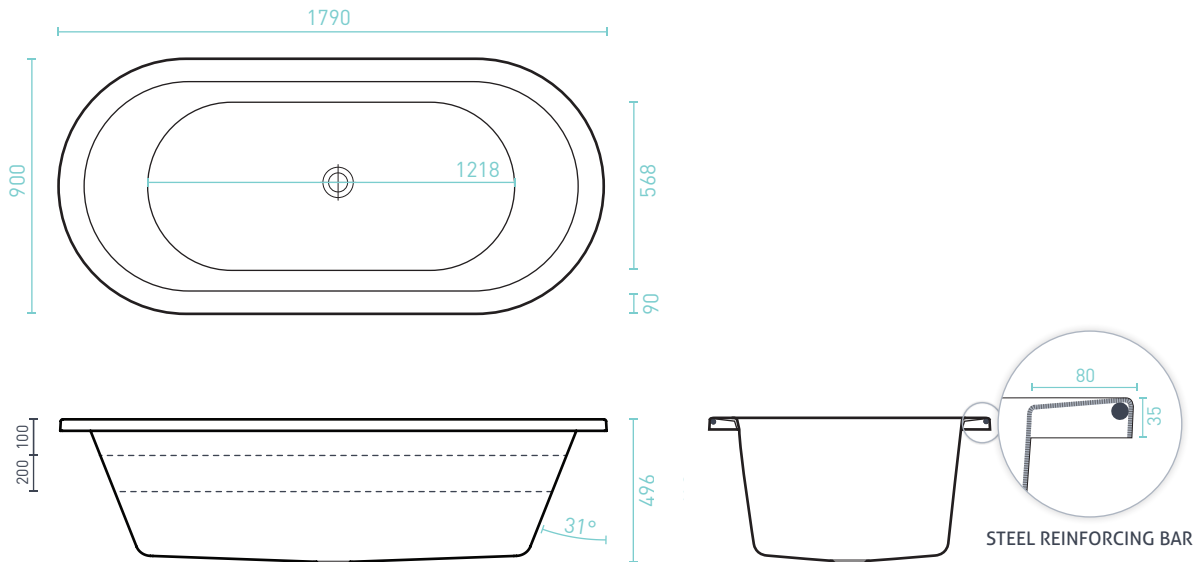

SPA BATH ORDER FORM

Spa baths are made to order on receipt of the order form & are non-refundable. Please allow 20 working days for completion & dispatch. We recommend filling out your SPA BATH ORDER FORM with your qualified spa bath installer.

COMPANY & BRANCH: _____ PHONE NO: _____

CONTACT: _____ ORDER NO: _____ DATE: _____

MODEL: _____ SIZE: _____ QTY: _____ RANGE SANTAI CONTOUR DOLCE VITA

SANTAI SPA BATH OPTIONS

PUMP UPGRADE Sensa-Touch Pad Control 3-Stage Heat (RRP \$471)

EZI FRAME (RRP \$146) Supplied Factory Fitted (Additional cost)

HEADRESTS (RRP \$99 each) White QTY: _____ Black QTY: _____

BASE SUPPORT FRAME Factory Fitted (RRP \$366)

OVERFLOW (RRP from \$135)

CONTOUR SPA BATH OPTIONS

EZI FRAME (RRP \$146) Supplied Factory Fitted (Additional cost)

HEADREST COLOUR (NO additional cost) White Black

BASE SUPPORT FRAME Factory Fitted (RRP \$366)

OVERFLOW (RRP from \$135)

DOLCE VITA SPA BATH OPTIONS

HEADREST COLOUR (NO extra cost) White Black

OVERFLOW (RRP from \$135)

JET COLOUR (NO extra cost) Chrome White Black

SPA PUMP NOTES

- The spa pump does not fit directly in the baths perimeter (allow 150mm)

- Waste positions can not be changed

- We recommend spa pumps installed outside are fitted with a Spa Pump Cover (RRP \$209)

- The spa pump must be easily accessible for maintenance

- The spa pump controls will always be at the front, unless indicated below

----- Please refer to the technical drawings before choosing your spa pump position, as spa bath waste & pump positions CAN'T be customised -----


1. CIRCLE YOUR PUMP POSITION A / B / C / D ON THE DIAGRAM

300mm of pipework & 2 elbows are supplied to install the pump in the correct orientation.

If extra pipework is required, how much? _____mm (max. recommended distance between the spa bath & pump is 1.2m)

2. CROSS (X) YOUR SHOWER HEAD POSITION ON THE DIAGRAM (if applicable)

Spa pump controls can not be on the same end as the shower.



CUSTOMER NAME: _____ CUSTOMER SIGNATURE: _____

CUSTOMER EMAIL: _____ CUSTOMER PHONE NO: _____

*Whilst every effort is made to adhere to published jet & fittings positions, variation to specifications may occur without notice.