

# 7 Day Programmable Timer

Installation & User Guide



# Contents


Installing the timer .....	3
User Interface .....	5
Setting the date & time .....	6
Heating modes .....	7
Advanced settings .....	8
Setup your heating schedule .....	9
Factory Reset .....	16
Temporary override .....	17
Holiday Mode .....	18
Key lock .....	19
Technical data .....	19
Service and support .....	20

# Installing the timer

Carefully remove the back of the timer by placing a flat head screwdriver into the slots on the bottom of the unit and push to release.

Unplug the cable connector from the back of the timer screen.

Connect the Thermorail towel rail to the timer as seen in the below wiring diagram.

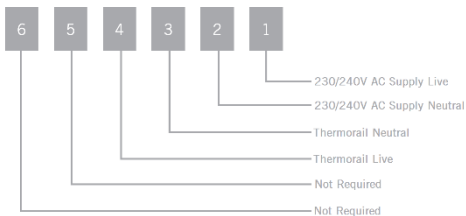


## Installing the timer

Screw the back plate of the timer to the electrical plate.


Plug the cable connector into the back of the timer screen and connect the screen to the back of the timer.

# User Interface: Portrait

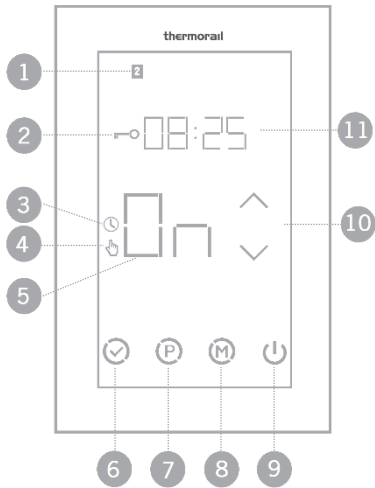

1. Day indicator
2. Key lock icon
3. Schedule mode icon
4. Manual mode icon
5. ON/OFF indicator
6. Confirm settings
7. Program button
8. Mode button
9. Power button
10. Up & down arrows
11. Time

# User Interface: Landscape

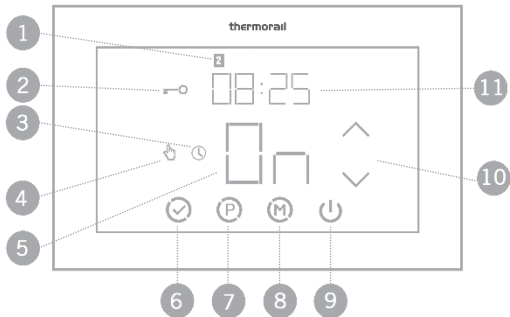


- |                       |                      |
|-----------------------|----------------------|
| 1. Day indicator      | 7. Program button    |
| 2. Key lock icon      | 8. Mode button       |
| 3. Schedule mode icon | 9. Power button      |
| 4. Manual mode icon   | 10. Up & down arrows |
| 5. ON/OFF indicator   | 11. Time             |
| 6. Confirm settings   |                      |

## Setting the date and time

Press  and the time will begin to flash


Use   to select the correct time

Press  until the day begins to flash  
(Note: Monday is Day 1)



Use   to select the correct day

Press  to save the settings

# Heating Modes

When the timer is on, press the  to switch between manual and schedule modes.

## Manual Mode

In manual mode press the   to set the ON/OFF status.


## Schedule Mode

In the schedule mode the timer will follow the heating schedule that is set.



Refer to page 9 for programming instructions.



# Advanced Settings

To access the advanced settings, turn the timer off by pressing 

Press  to display setting 01

Use the   to adjust the settings


Press  to cycle between setting 01 to 03

Press  to save the settings



Menu	Description	Range	Default
01	Clock Format	12 or 24	24
02	5+2 or 7 Day Programming	01=5+2 Day Program 02=7 Day Program	01=5+2 Day Program
03	Screen Saver	ON = Activated OF = Not Activated	OF=Not Activated

## Set up your heating schedule (For 5+2 Day Program)

Turn the timer on by pressing 

To set up the heating schedule for Monday to Friday press 

The time for P1 will flash. This is the first ON period for the day.

Use the   to adjust the time to when the heated towel rail will turn on in the morning.

Press  and the ON / OF will flash.


Using the   select ON for P1.

Press  to set period 2, which is when the rail will turn off. Use the   to adjust the time.

## Set up your heating schedule (For 5+2 Day Program)


Press  and the ON / OF will flash.

Using the   select OF for P2.

Repeat above steps for P3 and P4 and then press 

(Note: P3 is turning the heated towel rail on in the evening and P4 is turning it off in the evening)

If the heated towel rail is only required to be on once a day set to OF for both P3 and P4 and ensure that the time set for P3 and P4 is after the time set for P2.

When Monday-Friday has been set press  to go onto the Saturday and Sunday schedule.

## Set up your heating schedule (For 5+2 Day Program)

The time for P1 will flash. This is the first ON period for Saturday and Sunday.

Use the  $\wedge \vee$  to adjust the time to when the heated towel rail will turn on in the morning.

Press  $\textcircled{P}$  and the ON / OF will flash.

Using the  $\wedge \vee$  select ON for P1.

Press  $\textcircled{P}$  to set period 2, which is when the rail will turn off. Use the  $\wedge \vee$  to adjust the time.

Press  $\textcircled{P}$  and the ON / OF will flash.

Using the  $\wedge \vee$  select OF for P2.

Repeat above steps for P3 and P4.

## Set up your heating schedule (For 7 Day Program)

Turn the timer on by pressing 

Change the menu option 02 to setting 02


(7 Day Program) as per instructions on page 8.

The 7 day program option means that all 7 days are programmed to the same schedule or all 7 days are programmed individually.

Press  until the day display flashes.

If programming all 7 days individually use the

  to select the day to program first.

If programming all 7 days to the same schedule, press and hold the  button for about 5 seconds to select all 7 days.

## Set up your heating schedule (For 7 Day Program)

To set up the heating schedule press **(P)**

The time for P1 will flash. This is the first ON period for the day.

Use the **^** **v** to adjust the time the heated towel rail will turn on in the morning.

Press **(P)** and the ON / OF will flash.


Using the **^** **v** select ON for P1.

Press **(P)** to set period 2, which is when the rail will turn off. Use the **^** **v** to adjust the time.

Press **(P)** and the ON / OF will flash.




Using the **^** **v** select OF for P2.

## Set up your heating schedule (For 7 Day Program)

Repeat above steps for P3 and P4 and then press 

(Note: P3 is turning the heated towel rail on in the evening and P4 is turning it off in the evening)

If programming all 7 days to the same schedule, the program is now set up.

If programming all 7 days individually, press  and use the   to select the next day to program.

# Factory Reset

Press  to turn the timer off

Press and the hold  until **04** is displayed

Press and hold  for approx. 5 seconds



**FES** will display on the screen and then the timer has been reset.




Turn the timer back on to setup the program




## Temporary override


Turning the timer onto temporary override will allow the timer to be operated on manual until the next programmed period.


In schedule mode, press the   and the ON/OFF display will flash.

Use   to adjust the desired setting and press  to confirm.





**TEMPORARY** will be displayed below the ON/OFF display. To cancel the override setting press .

## Holiday Mode

The TRTS/TRTSB timer does not have a dedicated holiday mode. To suspend the heating schedule for a period of time turn the timer off using the  button.

This will ensure the heating schedule is held and then to resume the heating schedule press the  button.

## Key Lock

To lock the key pad, press and hold the  for 5 seconds or until the  displays. To unlock press and hold the  until the  disappears.

### Technical data

Supply voltage	230 - 240VAC
Maximum Load	16A
IP Rating	IP30
Warranty	2 Years
Width	80mm
Height	120mm
Depth	45mm (27mm in wall)

## Service and support

**Thermogroup**

PO Box 822

Leeton NSW 2705

1300 368 631

[sales@thermogroup.com.au](mailto:sales@thermogroup.com.au)

[www.thermogroup.com.au](http://www.thermogroup.com.au)

